



www.jasa.nl



Easybagger



JASA 250



JASA 350



JASA 350 CM



JASA 350 B



Quatro Pack



Quick Pack

JASA

The machine is suitable for packing bulk goods in bags from film on the reel. With some adaptations to the machine it can produce various bag styles. The constructions are in stainless steel and composite parts and therefore very suitable for the food-industry. The machine is equipped with an industrial PC operating system and is free programmable and very simple to operate by means of the JASA Smart Display. Up to 50 programs can be memorized and selected. Texts are in the English language (others on request).


The standard machine features:

- constructions complete in stainless steel and composite parts
- round forming set, size to be specified
- film splice unit
- printer frame for thermo transfer printer (standard)
- eye mark controlled bag length
- machine stop by end of film detection
- industrial PLC operating system
- up to 50 programs can be memorised and selected
- JASA Smart Display
- synchronisation for most weighing and dosing systems

In accordance with CE-standards the machine is equipped with the following safety systems:

- sealing jaw protection for not closing of the jaws with automatic machine stop
- in operating system integrated protections for breakdown, wire disconnection and not heated sealing jaws
- wide opening door covering the total sealing area

JASA machines are also available with lowered infeed or inclined versions for fragile products.

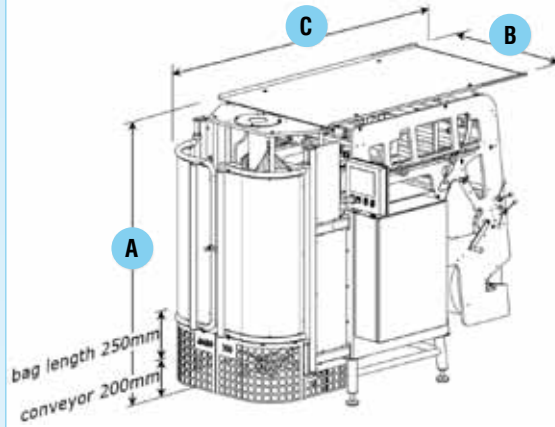


These drawings are rough sketches. Final designs differ per machine.

Technical specifications		250	350
Packing specifications			
bag width	mm	80-250	150-350
bag length, in one seal step (longer in multiple seal step)	mm	up to 420	up to 420
speed	pack/min.	up to 90	up to 50
Machine dimensions			
A	mm	1410	1610
B	mm	960	1270
C	mm	2030	2350
outside diameter film reel	mm	350	450
weight	kg	300	480
Electrical/pneumatical requirements			
3-fase 400V / 50 Hz +0+A			
electrical capacity	kW	2	3
pneumatical requirements	bar	6	6
pneumatical capacity (max)	l/min.	330	370
Options			
heatseal		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
heatseal + punching device		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
multiseal		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
multiseal + punching device		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
MAP-connection		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
vacuum unit		<input type="checkbox"/>	<input checked="" type="checkbox"/>
chainbags		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
gusseted bag unit		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
block bottom bag unit		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
printer systems		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
labeling systems		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
additional formingsets		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
doy (standing) pouch		<input type="checkbox"/>	<input checked="" type="checkbox"/>
doy pouch with reclosable strip		<input type="checkbox"/>	<input checked="" type="checkbox"/>

All details are indications. Final details differ per machine.



packaging varieties

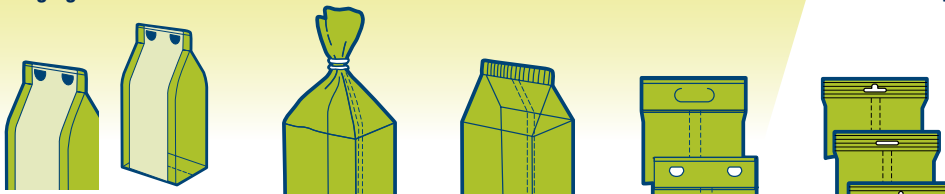

distributed by